

ROSCO HO90

LitePad

LitePad HO90 is Rosco's revolutionary, edge-lit LED source that lighting professionals use for accent and fill lighting – now featuring a high CRI output. At only 0.3" (8mm) thick, LitePad HO90 is able to fit in places where conventional light sources will not. LitePad HO90 is daylight balanced (5300K), features High CRI (90+) emitters and produces a soft, flattering quality of light that is easy on the eyes. Available in six standard sizes, LitePad HO90 has LEDs on all four sides of the perimeter for maximum brightness, while an interior connector provides a solid power connection directly on the LitePad itself. LitePad HO90 is the perfect solution for lighting night-time car interiors, adding a glow to scenery or props, or any situation that needs extra illumination without space for a traditional fixture.



SIZES

LitePad HO90 Daylight

- 290 90003 0120 LitePad 3 Circle HO90 Daylight
- 290 90306 0120 LitePad 3x6 HO90 Daylight
- 290 90312 0120 LitePad 3x12 HO90 Daylight
- 290 90606 0120 LitePad 6x6 HO90 Daylight
- 290 90612 0120 LitePad 6x12 HO90 Daylight
- 290 91212 0120 LitePad 12x12 HO90 Daylight

IN THE BOX



- LitePad HO90
- Transformer
- Right Angle Extension Cable

POWER CONSUMPTION

	Wattage	Amps
3" Circle	3.25	0.27
3" x 6"	6	0.5
3" x 12"	9.75	0.81
6" x 6"	7.75	0.65
6" x 12"	12	1
12" x 12"	16	1.33

PROPERTIES

- Color Temperature: 5300K
- CRI: 93
- Lamp Life: 60,000 hrs
- Operating Temperature: -30°C - +85°C
- Power: 12V DC Input

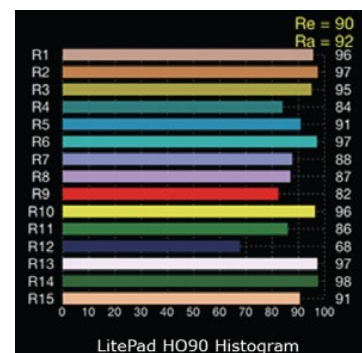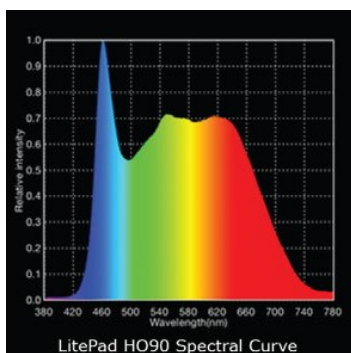



LitePad HO90

DIMENSIONS & WEIGHT

	Width	Length	Depth	Weight
3" Circle	3.0" Diameter		0.37"	0.10 lbs.
3" x 6"	3.0"	6.0"	0.37"	0.30 lbs.
3" x 12"	3.0"	12.0"	0.37"	0.55 lbs.
6" x 6"	6.0"	6.0"	0.37"	0.55 lbs.
6" x 12"	6.0"	12.0"	0.37"	1.10 lbs.
12" x 12"	12.0"	12.0"	0.37"	2.15 lbs.

LIGHT OUTPUT

	Units	12"	18"	24"	36"	48"
3" Circle	FC	21	9	5.3	2.5	1.5
	LUX	230	100	57	26	16
3" x 6"	FC	50	23	13	6	3.5
	LUX	520	240	140	65	37
3" x 12"	FC	70	37	21	10	5.6
	LUX	800	400	230	110	60
6" x 6"	FC	70	34	18	8.5	5
	LUX	740	370	200	90	53
6" x 12"	FC	120	60	34	16	9
	LUX	1300	640	370	170	100
12" x 12"	FC	180	90	52	25	14
	LUX	1900	970	560	260	150